


Дистрибьютер DME в России ООО "Система" +7 (495) 199-14-51 www.system.com.ru

Информация

d1 = Диаметр стержня
d2 = Диаметр головки
d3 = Диаметр утолщения
K = Толщина головки
L1 = Длина
L2 = Длина утолщения + толщина головки
Стандарт: DIN1530/ISO8694
Материал: сталь WAS (~1.2344)
Макс. темп.: 500-550 °C
Шероховатость: Ra

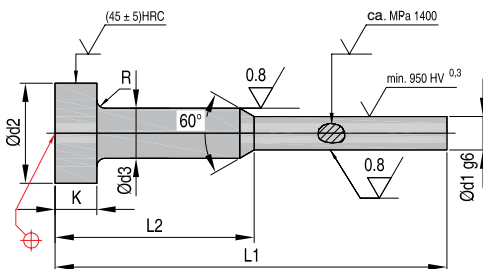

| Код для заказа | Тип | d1 g6 | d2 0 -0.2 | d3 h11 | K 0 -0.05 | R +0.2 0 | L1 ^{±0.05} | | | | | | | | | | |
|-----------------|-----|----------|-----------------|-----------|-----------------|----------------|---------------------|------|------|------|------|------|------|------|------|------|--|
| | | | | | | | 0080 | 0100 | 0125 | 0160 | 0160 | 0160 | 0200 | 0250 | 0250 | | |
| | | | | | | | L2 ^{±0.05} | | | | | | | | | | |
| | | | | | | | 0035 | 0050 | 0050 | 0050 | 0063 | 0075 | 0075 | 0075 | 0075 | 0100 | |
| ENC05 0-7 L1 L2 | ТС | 0,700 | 4,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | | |
| ENC05 0-8 L1 L2 | | 0,800 | 4,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | | |
| ENC05 0-9 L1 L2 | | 0,900 | 4,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | | |
| ENC05 1-0 L1 L2 | | 01,00 | 4,0 | 2,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | |
| ENC05 1-1 L1 L2 | | 01,10 | 4,0 | 2,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | |
| ENC05 1-2 L1 L2 | | 01,20 | 4,0 | 2,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | |
| ENC05 1-3 L1 L2 | | 01,30 | 4,0 | 2,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | |
| ENC05 1-4 L1 L2 | | 01,40 | 4,0 | 2,0 | 2,0 | 2,0 | 0,2 | | | | | | | | | | |
| ENC05 1-5 L1 L2 | | 01,50 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 1-6 L1 L2 | | 01,60 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 1-7 L1 L2 | | 01,70 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 1-8 L1 L2 | | 01,80 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 1-9 L1 L2 | | 01,90 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-0 L1 L2 | | 02,00 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-1 L1 L2 | | 02,10 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-2 L1 L2 | | 02,20 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-3 L1 L2 | | 02,30 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-4 L1 L2 | | 02,40 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-5 L1 L2 | | 02,50 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-6 L1 L2 | | 02,60 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-7 L1 L2 | | 02,70 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-8 L1 L2 | | 02,80 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 2-9 L1 L2 | | 02,90 | 6,0 | 3,0 | 3,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-0 L1 L2 | | 03,00 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-1 L1 L2 | | 03,10 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-2 L1 L2 | | 03,20 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-3 L1 L2 | | 03,30 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-4 L1 L2 | | 03,40 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |
| ENC05 3-5 L1 L2 | | 03,50 | 8,0 | 4,0 | 4,0 | 3,0 | 0,3 | | | | | | | | | | |

* Для L1 0160 0250 добавьте (5), (6), (7) для L2

