


Информация

d1 = Диаметр стержня
d2 = Диаметр головки
K = Толщина головки
L = Длина
Стандарт: DIN1530/ISO6751
Материал: сталь WAS (~1.2344),
 закаленная
Макс. темп.: 500-550 °C
Шероховатость: Ra

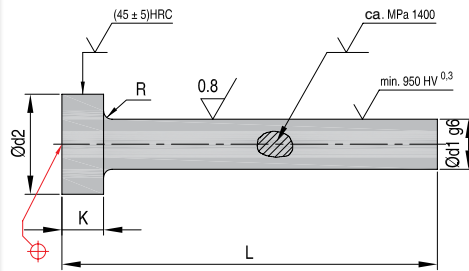

| Код для заказа | Тип | d1 мм | d2 0 -0,2 | K 0 -0,05 | R +0,2 0 | L ₀ ⁺² | | | | | | | | | | | | | | | | |
|----------------|-------|----------|-----------------|-----------------|----------------|------------------------------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| | | | | | | 0100 | 0125 | 0160 | 0200 | 0250 | 0315 | 0400 | 0500 | 0630 | 0800 | 1000 | | | | | | |
| ТА 01-50 L | ТА | 01,50 | 3,0 | 1,58 | 0,2 | | | | | | | | | | | | | | | | | |
| ТА 02-00 L | | 02,00 | 4,0 | 2,0 | 0,2 | | | | | | | | | | | | | | | | | |
| ТА 02-20 L | | 02,20 | 4,0 | 2,0 | 0,2 | | | | | | | | | | | | | | | | | |
| ТА 02-50 L | | 02,50 | 5,0 | 2,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 02-70 L | | 02,70 | 5,0 | 2,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 03-00 L | | 03,00 | 6,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 03-20 L | | 03,20 | 6,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 03-50 L | | 03,50 | 7,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 03-70 L | | 03,70 | 7,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 04-00 L | | 04,00 | 8,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 04-20 L | | 04,20 | 8,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 04-50 L | | 04,50 | 8,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 05-00 L | | 05,00 | 10,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 05-20 L | | 05,20 | 10,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 05-50 L | | 05,50 | 10,0 | 3,0 | 0,3 | | | | | | | | | | | | | | | | | |
| ТА 06-00 L | | 06,00 | 12,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 06-20 L | | 06,20 | 12,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 06-50 L | | 06,50 | 12,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 07-00 L | | 07,00 | 12,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 08-00 L | | 08,00 | 14,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 08-20 L | | 08,20 | 14,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 08-50 L | | 08,50 | 14,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 09-00 L | | 09,00 | 14,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 10-00 L | | 10,00 | 16,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 10-20 L | | 10,20 | 16,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | |
| ТА 10-50 L | 10,50 | 16,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | | |
| ТА 11-00 L | 11,00 | 16,0 | 5,0 | 0,5 | | | | | | | | | | | | | | | | | | |
| ТА 12-00 L | 12,00 | 18,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 12-20 L | 12,20 | 18,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 12-50 L | 12,50 | 18,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 14-00 L | 14,00 | 22,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 16-00 L | 16,00 | 22,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 18-00 L | 18,00 | 24,0 | 7,0 | 0,8 | | | | | | | | | | | | | | | | | | |
| ТА 20-00 L | 20,00 | 26,0 | 8,0 | 1,0 | | | | | | | | | | | | | | | | | | |
| ТА 25-00 L | 25,00 | 32,0 | 10,0 | 1,0 | | | | | | | | | | | | | | | | | | |

www.system.com.ru