


Информация

d1 = Диаметр стержня
d2 = Диаметр головки
d3 = Диаметр утолщения
K = Толщина головки
L1 = Длина
L2 = Длина утолщения+ толщина головки
Стандарт: DIN1530/ISO8694
Материал: сталь WS (~1.2067)
Макс. темп.: 250 °C
Шероховатость: Ra

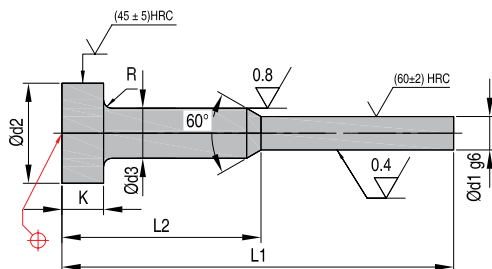

Код для заказа	Тип	d1 g6	d2 0 -0.2	d3 h11	K 0 -0.05	R +0.2 0	L1 ⁺² ₀									
							0063	0080	0100	0125	0160	0160	0200	0250	0250	
							L2 ⁻³ ₀									
							0025	0035	0050	0050	0050	0063	0075	0075	0075	0100
SHE28 0-5 L1 L2	СН	00,50	4,0	2,0	2,0	0,2										
SHE28 0-6 L1 L2		00,60	4,0	2,0	2,0	0,2										
SHE28 0-7 L1 L2		00,70	4,0	2,0	2,0	0,2										
SHE28 0-8 L1 L2		00,80	4,0	2,0	2,0	0,2										
SHE28 0-9 L1 L2		00,90	4,0	2,0	2,0	0,2										
SHE28 1-0 L1 L2		01,00	4,0	2,0	2,0	0,2										
SHE28 1-1 L1 L2		01,10	4,0	2,0	2,0	0,2										
SHE28 1-2 L1 L2		01,20	4,0	2,0	2,0	0,2										
SHE28 1-3 L1 L2		01,30	4,0	2,0	2,0	0,2										
SHE28 1-4 L1 L2		01,40	4,0	2,0	2,0	0,2										
SHE28 1-5 L1 L2		01,50	6,0	3,0	3,0	0,3										
SHE28 1-6 L1 L2		01,60	6,0	3,0	3,0	0,3										
SHE28 1-7 L1 L2		01,70	6,0	3,0	3,0	0,3										
SHE28 1-8 L1 L2		01,80	6,0	3,0	3,0	0,3										
SHE28 1-9 L1 L2		01,90	6,0	3,0	3,0	0,3										
SHE28 2-0 L1 L2		02,00	6,0	3,0	3,0	0,3										
SHE28 2-1 L1 L2		02,10	6,0	3,0	3,0	0,3										
SHE28 2-2 L1 L2		02,20	6,0	3,0	3,0	0,3										
SHE28 2-3 L1 L2		02,30	6,0	3,0	3,0	0,3										
SHE28 2-4 L1 L2		02,40	6,0	3,0	3,0	0,3										
SHE28 2-5 L1 L2	02,50	6,0	3,0	3,0	0,3											
SHE28 2-6 L1 L2	02,60	6,0	3,0	3,0	0,3											
SHE28 2-7 L1 L2	02,70	6,0	3,0	3,0	0,3											
SHE28 2-8 L1 L2	02,80	6,0	3,0	3,0	0,3											
SHE28 2-9 L1 L2	02,90	6,0	3,0	3,0	0,3											

* Для L1 0160 0250 добавьте (5), (6), (7) для L2